

# Stripping Floor Finish




Provided by:



Great Western Supply Co.




1 Gather equipment.



2 Dust mop the floor. Make overlapping passes.




3 Tape off doorways and edges. Place wet floor signs at all entranceways. 10 - 15 Minutes




4 Wear proper personal protective equipment.




5 Mix the stripper solution properly with cool water.




6 Spray the baseboards with baseboard stripper. Scrub with a white pad and rinse.




7 Scrape finish from the edges with a black pad, when needed.




8 Apply the stripper solution liberally to the floor. Let dwell for 10 - 15 minutes.

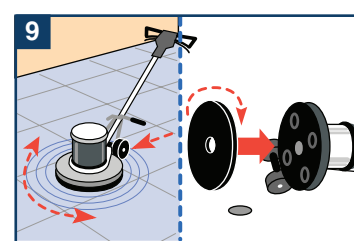

9 Scrub the floor using clean black or high-performance pads. Flip or change pads as needed.




10 Use a wet vacuum to pick up stripper solution.

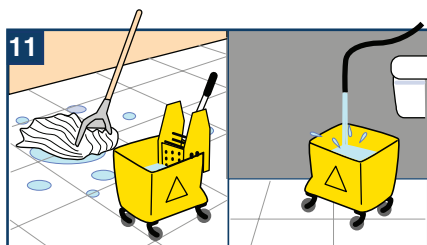

11 Damp mop rinse with clean water. Change the water frequently.



12 Clean and store equipment properly.

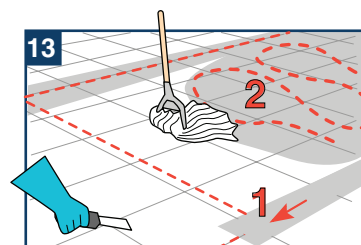

13 Inspect floor to make sure there is no residue. Apply floor finish when dry.

= Green Cleaning Process

## Green Cleaning Tips

- Try to prevent the complete removal of floor finish by creating a good maintenance program.
- Notify occupants beforehand that stripping will occur.
- Make sure the area has good ventilation.
- Perform stripping procedures on an as needed basis rather than a predetermined schedule.

## Great Western Supply Company

116 East 53rd Street  
Davenport, IA 52806

**563-445-6644**

Fax: 563-445-6654

[www.greatwesternsupply.com](http://www.greatwesternsupply.com)

Pro-Link, Inc.

Telephone: 800-74-LINKS

[www.prolinkhq.com](http://www.prolinkhq.com)